



乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

website: www.indicatorlight.com Tel: 0577-27878383 Fax: 0577-27878383-8027

Address: #19 Ke'aisi Road, Xiangyang industrial area, Liushi Town, Yueqing City

SPECIFICATION FOR APPROVAL

规格说明书

CUSTOMER'S CODE

本厂代码: FLP12-BJ-1-XC003-P10M4

DESCRIPTION

品名: FLP12-10 球头插脚自复带灯塑料按钮

SPECIFICATION

规格: 12mm

DATE

编制日期: _____

PART NO.

本厂型号: _____

REFERENCE No.


档案编号: _____

Approved By Customer 编制	Qualified By 审核	Form Designer 批准


1. 图片 Picture:




2. 图纸 drawing

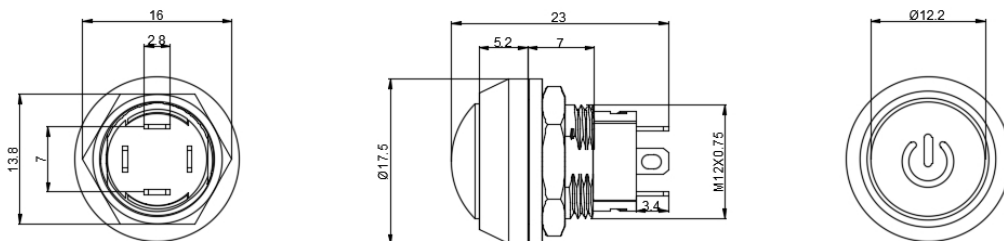

电器简图



安装孔图





乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

website: www.indicatorlight.com Tel: 0577-27878383 Fax: 0577-27878383-8027

Address: #19 Ke'aisi Road, Xiangyang industrial area, Liushi Town, Yueqing City

3 配件材料 component material

配件名 Component name	材料 material
按键 The keys	PC 塑料 PC plastic
外壳套筒 The shell	PC 塑料 PC plastic
按钮引脚 pin	H62 铜合金
橡胶圈 Rubber ring	硅胶 silicone
螺帽 nut	H59 黄铜 H59 nickel plated brass
底座 housing	PA66+GF20%阻燃尼龙 PA66+GF20% nylon
灯珠颜色 Lamp bead color	红、黄、蓝、绿、白 Red, yellow, blue, green , white

4 性能参数 performance parameter

项目 items	参数 parameter
开关额定电压 Rated voltage	36V DC 250V AC
开关额定电流 rated current	3A DC 3A AC
绝缘耐压 Insulation and voltage resistance	1500V
接触电阻: Point resistanc:	$\leq 50m\Omega$ $\leq 50m\Omega$
绝缘电阻: Isolation resistance:	$\geq 100M\Omega$ $\geq 100M\Omega$
机械寿命	50 万次
电气寿命 electrical life	10 万次
工作环境温度 Operating temperature	-25℃~+85℃
防护等级(头部) IP degree	IP65 IK08