



乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

Address : F/6 No.19 Keaisi road xiangyang industrial zone road tantou liushi yueqing wenzhou

Tel: 0577-27878383

website: www.indicatorlight.com

Fax: 0577-27878383-8027

SPECIFICATION FOR APPROVAL

规格说明书

CUSTOMER'S CODE

本厂代码: _____

DESCRIPTION

品 名: _____ FLM16-11HEWZ 高头带线自锁金属按钮

SPECIFICATION

规 格: _____ 16mm

DATE

编制日期: _____

PART NO.

本厂型号: _____

REFERENCE No.

档案编号: _____

| Approved By Customer 编 制 | Qualified By 审 核 | Form Designer 批 准 |
|-----------------------------|---------------------|----------------------|
| | | |



乐清市裕林电子有限公司

Yueqing Yulin Electrical Co., Ltd

Address : F/6 No.19 Keaisi road xiangyang industrial zone road tantou liushi yueqing wenzhou

Tel: 0577-27878383

website: www.indicatorlight.com


Fax: 0577-27878383-8027

1. 图片 Picture:





16MM

2. 图纸 drawing

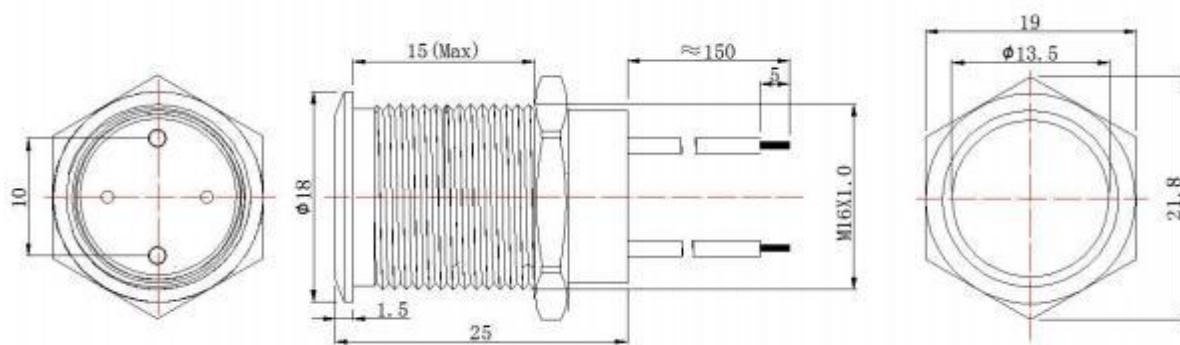

电气简图

安装孔图

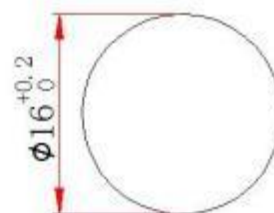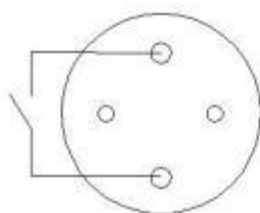

3 配件材料 component material

| 配 件 名 Component name | 材料 material |
|-------------------------|--|
| 导光按键 | |
| 按键 | 304 不锈钢 304 Stainless steel |
| 外壳套筒 | H59黄铜/304不锈钢 H59 nickel plated brass/304 Stainless steel |
| 按钮开关脚 | 0.75mm ² PTFE 铁氟龙导线 |
| 防水圈 rubber ring | SIL 硅胶 SIL silica gel |
| 螺帽 nut | H59 黄铜 H59 nickel plated brass |
| 底座 housing | PA66+GF20%阻燃尼龙 PA66+GF20% nylon |
| 光源 Light source | |
| 电阻 Resistor | |
| 触点 | 银触点 AgCd012 |
| | |
| | |

4 性能参数 performance parameter

| 项目 items | 参数 parameter |
|--|-------------------------|
| 开关额定电压 Rated voltage | 36V DC 250V AC |
| 开关额定电流 rated current | 5A DC 5A AC |
| 指示灯额定电压 | |
| 指示灯额定电流 | |
| 额定功率 rated power | 180W (DC) 1250W (AC) |
| 绝缘耐压 Insulation and voltage resistance | 1800V |
| 接触电阻: Point resistanc: | ≤50mΩ |
| 绝缘电阻: Isolation resistance: | ≥100MΩ |
| 机械寿命 | 50 万次 |
| 电气寿命 electrical life | 10 万次 |
| 工作环境温度 Operating temperature | -25℃~+85℃ |
| 防护等级(头部) IP degree | IP67 IK09 |
| 指示灯颜色 | |